


2C23 Profibus DP

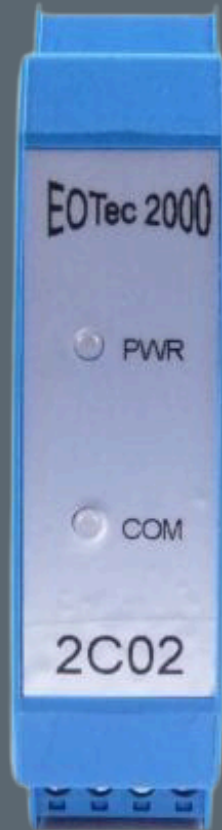

Overview

Electrical Interface Modules (EIM) connect the copper signal to digital signal for transmission over fiber via the Optical Interface Module (OIM). The basic modem configuration consists of a power supply, an EIM and an OIM. Additional modules may be added to configure daisy-chain, star and self-healing ring (SHR) topologies.

Technical specification

| Feature | Description |
|--|--|
| Protocol and extra features | Profibus - DP, self-healing ring and external 24Vdc power |
| Communications data rate | 9.6K, 19.2K, 45.45K, 93.75K, 187.5K, 500K, 1.5M, 3.0M, 6.0M & 12.0M |
| Copper cable connector | DB-9 Pin |
| Copper cable end termination | User supplied |
| Maximum devices and copper cable length supported per module | Per Profibus Specifications |
| Ambient conditions | -40 to 85° operational, 0-95% relative humidity non-condensing |
| Power requirement (bus) | 9Vdc @ 200mA maximum per module |
| Power indicator | Green LED |
| Communications activity indicator | Amber LED |
| Certifications | CE Marked, Class I, Division 2, Groups A, B, C & D (on selected models), US and Canada |
| Weight | < 9oz |
| Accessories | Power supply: 2A06, 2A16, 2A08, 2A18 |
| Installation instructions | Shipped with product or available on request |

Technical notice: 2C22 and 2C23 Profibus EIMs, and 2E06, 2E07, 2E09, 2E10, 2E19, 2E36, 2E46, 2D06, 2D07, 2D09, 2D10, 2D19, 2D36 and 2D46 OIMs used together in the EOTec 2000 fiber optic modem system. Symptom: when using Profibus modules with the OIMs listed above, erratic communications and/or LED indicator functions may be encountered. Changing the OIM(s) in the modem stack may correct the issue. Products and versions: the issue lies with a particular firmware version installed in the EOTec 2000 OIM manufactured during portions of calendar year 2006 and 2007. A particular optical module's firmware version may cause the issue but only when used in conjunction with the Profibus modules 2C22 and 2C23. The firmware in question was installed in EOTec 2000 Series OIM beginning with serial number 0102986 and ending 0111538. Upgrades: EOTec 2000 series OIMs that are within the warranty period can be returned to the factory and their firmware will be upgraded to the latest version at no charge. Contact Ultra Energy or your distributor for additional information, determining warranty and non-warranty and to obtain a return authorization number for returns to the factory.

About Ultra Energy

Organizations working with nuclear and industrial technologies must deliver reliable production at the same time as safeguarding people, the environment and infrastructure. We develop and manufacture measurement and control solutions that give our customers complete, long-term control over systems operating in harsh environments, helping them operate safely and increasing the value derived from their investments over their total lifespan.

Part of Curtiss-Wright, Ultra Energy has worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

United States of America

707 Jeffrey Way
Round Rock
Texas 78665-2408
USA

Tel: +1 512-434-2800

United Kingdom

Innovation House
Lancaster Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7SQ
UK

Tel: +44 (0) 1202 850 450

For more information

Web: ultra.energy

Email: sales@ultra.energy