




201 and 203 welded fitting TC

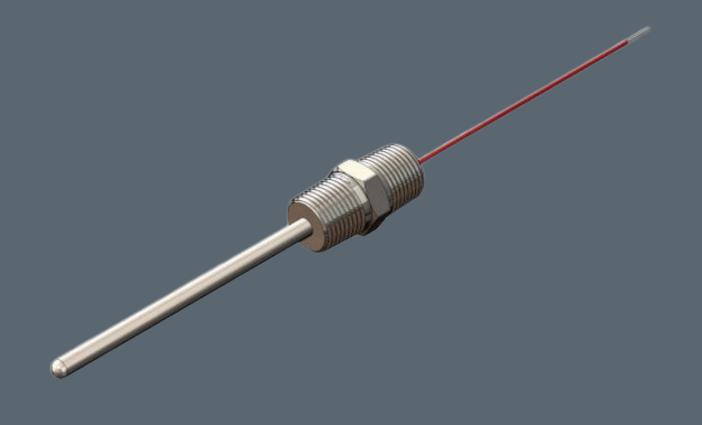

Key features

- Model 201 is a straight sheath direct immersion temperature sensor
- Model 203 is a direct immersion, reduced tip/fast response temperature sensor

Overview

Designed for direct immersion applications where a male fitting is required for mounting.



Technical specification

Feature	Description
Element type	Standard Type K -328 to 2300°F, with types J, T E and N available
Accuracy	ANSI Special Limits of Error is standard
Junction	Standard ungrounded, with grounded and exposed options
Construction	Inconel sheathed MgO construction, fiberglass insulated lead wire
Lead wires	Standard single 24" with no head
Sheath diameter	Standard .250" diameter, with options of 1/8", 3/16" and other
Welded fittings	Standard 1/2" NPT hex nipple - 316 stainless steel (option: hex plug)
Lead wire protection	Optional stainless steel overbraid, stainless steel armor
Accessory	1/2" NPT spring loaded hex fitting kit



About Ultra Energy

Organizations working with nuclear and industrial technologies must deliver reliable production at the same time as safeguarding people, the environment and infrastructure. We develop and manufacture measurement and control solutions that give our customers complete, long-term control over systems operating in harsh environments, helping them operate safely and increasing the value derived from their investments over their total lifespan.

Part of Ultra Group, a global electronics company, Ultra Energy has worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

United States of America

707 Jeffrey Way Round Rock Texas 78665-2408 USA

Tel: +1 512-434-2800

United Kingdom

Innovation House Lancaster Road Ferndown Industrial Estate Wimborne Dorset BH21 7SQ UK

Tel: +44 (0) 1202 850 450

For more information

Web: <u>ultra.energy</u>

Email: <u>sales@ultra.energy</u>

