


301 and 304 spring loaded RTD

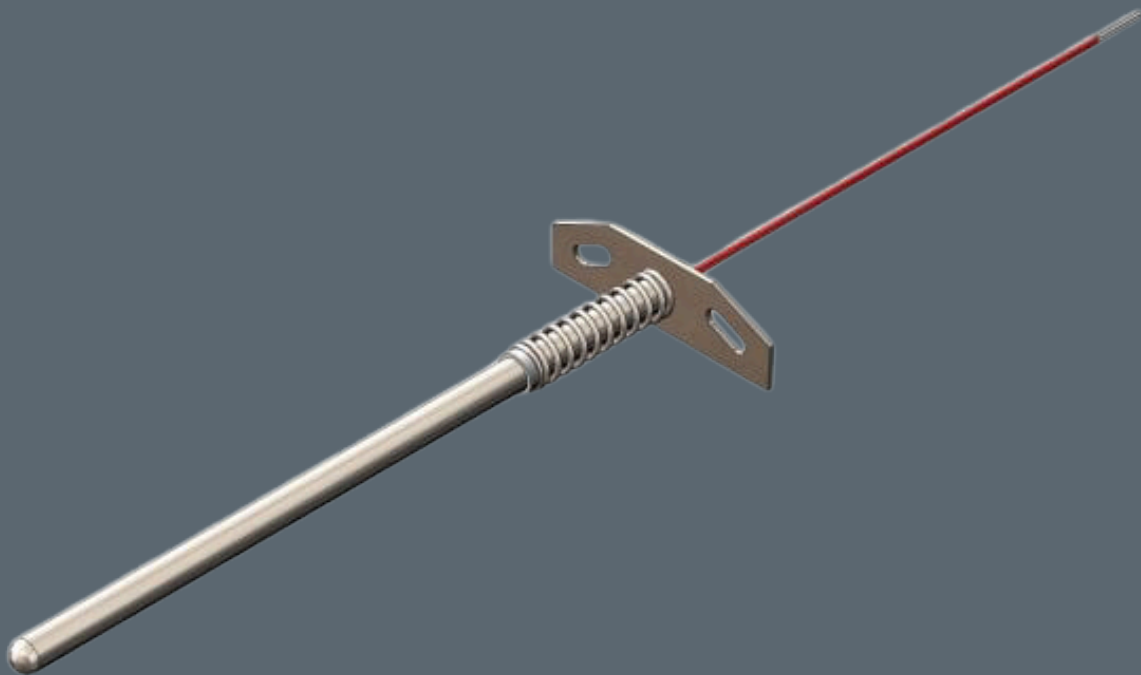

Overview

Designed for applications where a cast iron explosion-proof connection head and a thermowell are required. The spring-loaded action of this RTD ensures proper contact with the tip of the thermowell for maximum heat transfer.

Key features

- Model 301: Refer to Model 302 for general purpose connection head applications. Refer to Model 305 if spring-loaded hex fitting is needed.
- Model 304: Tip Sensitive temperature sensor. The tip sensitive design is ideal for bearing temperature applications. Refer to Model 303 for general purpose connection head applications.

Technical specification

Feature	Description
Element type	Standard platinum, 100 ohms @ 0C (32F), .00385 TCR, with optional Pt Ro and TCRs available
Accuracy	Standard DIN-B, with optional DIN-A and others available upon request
Construction	Standard 500°F service temperature, with optional high temperature and rugged constructions available
Lead wire configuration	Standard 3 Wire, with optional: 2, 4, 6 or 8 wire
Sensor sheath diameter	Standard 1/4" diameter, with optional 1/8", 3/16" and others available
Lead wire length	Standard 6", with custom length available
Connections	Options of standard and miniature sizes, as well as standard and high temperature ratings
Fittings	Optional compression and spring loaded fittings with various NPT connections
Insulation resistance	Greater than 100 Megohms @ 100VDC @ 21C (70F)

About Ultra Energy

Organizations working with nuclear and industrial technologies must deliver reliable production at the same time as safeguarding people, the environment and infrastructure. We develop and manufacture measurement and control solutions that give our customers complete, long-term control over systems operating in harsh environments, helping them operate safely and increasing the value derived from their investments over their total lifespan.

Part of Curtiss-Wright, Ultra Energy has worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

United States of America

707 Jeffrey Way
Round Rock
Texas 78665-2408
USA

Tel: +1 512-434-2800

United Kingdom

Innovation House
Lancaster Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7SQ
UK

Tel: +44 (0) 1202 850 450

For more information

Web: ultra.energy

Email: sales@ultra.energy