


2A08 24 VDC power supply module

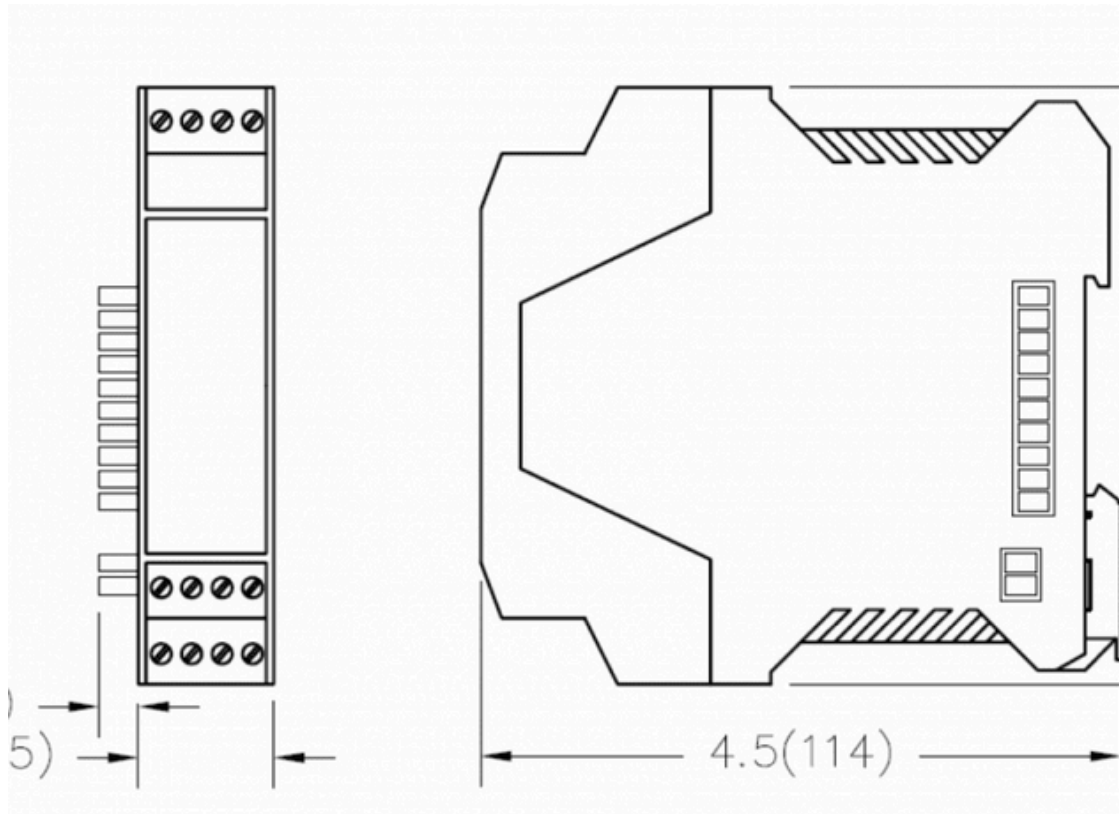

Feature	Description
Input power range	24Vdc \pm 20%, 400mA
Operating power output	Regulated, 9Vdc 1.1A maximum
Input fuse type	400mA slow-blow

Technical specification

Feature	Description
Compatibility	All bus powered modules except EOTec 2000 analog data links
Ambient conditions	-40 to 85°C operational, 0-95% relative humidity, non-condensing
Diagnostic output	2A18 only
Weight	<9oz. (250g)
Installation instructions	Shipped with product or available on request

United States of America

707 Jeffrey Way
Round Rock
Texas 78665-2408
USA

Tel: +1 512-434-2800

United Kingdom

Innovation House
Lancaster Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7SQ
UK

Tel: +44 (0) 1202 850 450

For more information

Web: cwic.curtisswright.com

Email: sales@nspi.curtisswright.com

About Curtiss-Wright

Curtiss-Wright Round Rock and Wimborne have worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

Curtiss-Wright Corporation (NYSE: CW) is a global integrated business that provides highly engineered products, solutions and services mainly to Aerospace & Defense markets, as well as critical technologies in demanding commercial power, process and industrial markets. We leverage a workforce of approximately 8,600 highly skilled employees who develop, design and build what we believe are the best engineered solutions to the markets we serve. Building on the heritage of Glenn Curtiss and the Wright brothers, Curtiss-Wright has a long tradition of providing innovative solutions through trusted customer relationships.