


N9356 rigid RTD assembly

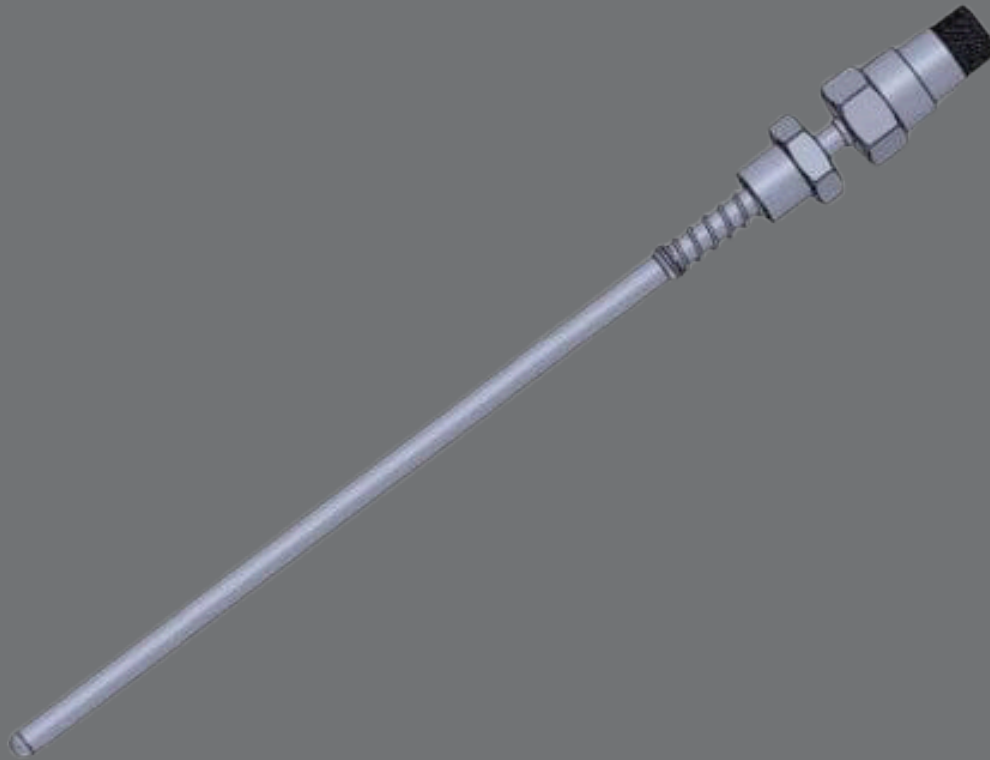

Key applications

- Inlet & outlet service temperature measurement
- Hydrogen recombiner temperature measurement
- Emergency diesel generator coolant temperature
- Bearing temperature measurement
- Air temperature monitoring (non-thermowell mount)
- Direct replacement for obsolete Rosemount Model 104ACF

Overview

The model N9356 Rigid RTD is specifically designed and qualified for use in CANDU power plants for installation into an adapter fitting interfaced with a thermowell or direct installation on a bracket. The RTD is qualified per IEEE 323-1974/1983 and IEEE 344-1975/1987 for use in Class 1E harsh environments, but can also be used for non-safety applications.



Technical specification

Feature	Description
Maximum operating temperature	32°F to 608°F (0°C to 320°C)
Element type	Platinum (wire-wound)
Accuracy/interchangeability	IEC 60751 Class B is standard. IEC 60751 Class A is available upon request. Each RTD can be supplied with a specific temperature versus resistance calibration table for the applicable range and customer specified interval. Other special accuracies are also available.
Calibration points	Standard calibration points are 0°, 100° and 316°C (32°, 212° and 600.8°F).
Drift/stability	RTD drift will remain within 0.5°C (0.9°F) over a 40 year period exclusive of process-induced drift. Drift per year will not exceed 0.05°C (0.09°F).
Insulation resistance	At room temperature and dry external surfaces, the insulation resistance between any wire and the sensor case will be at least 1000 MΩ with 100 VDC applied for a minimum of 30 seconds prior to measurement. With the sensing portion of the RTD stabilized at 312°C (593.6°F), the RTD insulation resistance is greater than 50 MΩ with 100 VDC applied for a minimum of 30 seconds prior to measurement.
Operating current	Standard operating current is 1 to 8.5 mA continuous. A continuous current of 20 mA (RMS) or less will not damage the sensor. A short duration or pulsed current of 40 mA maximum will not damage the sensor.
Self-heating error	The RTD is capable of dissipating 10 mW without causing the indicated temperature to rise more than 0.2°C [0.36°F] when testing is performed with the sensor, mounted in its thermowell, is placed in water flowing at 1 m/s (~3 ft/s) flowing transverse to the sensor at 76°C [168.8°F].



Technical specification

Feature	Description
Qualification	RTD assemblies are qualified to Class 1E requirements of IEEE 323-1974/1983 and IEEE 344-1975/1987.
Quality standards	RTD assemblies are supplied in accordance with Curtiss-Wright's QA/QC Quality Assurance & Control Manual 100-1 which meets the requirements of CSA Z299.1, 10 CFR 50 Appendix B, 10 CFR Part 21, ISO 9001, ASME NQA-1 and ANSI N45.2.
Sheath material	Stainless steel
Electrical connector	Hermetically Sealed MS 10SL-3P, 3-Pin or MS 14S-2P, 4-Pin connector
Sheath insulation material	MgO
Internal leadwire material	Solid Constantan
Mounting connections	Spring-loaded female bayonet connector for mounting with an adapter assembly into a thermowell. Threaded or swaged fitting connection for direct mounting. Consult the factory if custom mounting connections are required.
Shipping weight	Approximately 0.75 lbs. Actual weight will depend upon final configuration/length supplied.
Identification tags	S.S. identification tag attached to terminal head using SS braided cable. Custom configured tagging is available upon request.
Storage requirements	RTDs to be stored in accordance with ANSI N45.2 Level B or better.
Accessories	• 304L S.S. hex nut with 1-14UNS threads for adapter tube assemblies - 0885-101-0350T • 304L S.S. adapter tube retainer fitting for 1/2" diameter tube - 0885-101-0352T



Technical specification


Model number configurator

N9356	Model N9339 Flexible RTD Assembly			
	Code	Element Style		
	S	Single Platinum Element, 3 or 4 Wire Configuration		
	X	Other		
		Code	Resistance at 0°C (32°F)	
		1	100 Ohms	
		2	200 Ohms	
		Code	Temperature Coefficient (Ohms/Ohm/°C)	
		A	0.003902	
		B	0.00385055	
		C	0.00391	
		X	Other, Consult Factory	
			Code	Length "L", inches
			8.000	8 in. 203.2 mm
			9.182	9.182 in. 233.2 mm
			9.970	9.970 in. 253.2 mm
			X.XXX	Other, Consult Factory
N9356	S	-	1	A - 9.970

Technical specification


Wiring diagram

MS 10SL-3P PIN DIAGRAM




PIN SIDE

RTD WIRING DIAGRAM

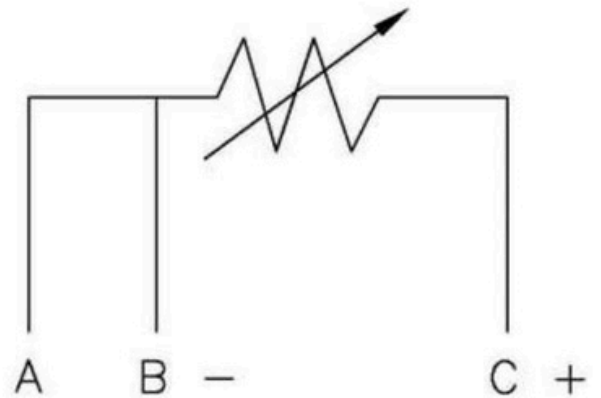


MS 14S-2P PIN DIAGRAM



PIN SIDE

RTD WIRING DIAGRAM

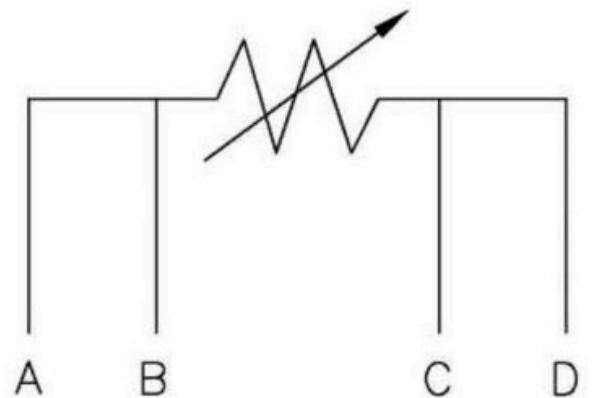

FAQs

Can I specify my own required calibration points?

Yes. Calibration at ice point (32°F/0°C) and boiling point (212°F/100°C) are required to determine the appropriate Alpha temperature coefficient. Up to 4 additional calibration points at higher temperatures can be specified. Data from only 3 of the actual calibration points (32°F/0°C, 212°F/100°C and a select third point) will be used to generate a custom temperature versus resistance table using the Callendar-Van Dusen equation.

Can the N9356 RTD be ordered to meet special accuracy needs?

Yes. Please contact Nuclear Sales with the specific requirements so we may determine if we can meet your needs.



United States of America

707 Jeffrey Way
Round Rock
Texas 78665-2408
USA

Tel: +1 512-434-2800

United Kingdom

Innovation House
Lancaster Road
Ferndown Industrial Estate
Wimborne
Dorset BH21 7SQ
UK

Tel: +44 (0) 1202 850 450

For more information

Web: cwic.curtisswright.com

Email: sales@nspi.curtisswright.com

About Curtiss-Wright

Curtiss-Wright Round Rock and Wimborne have worked with nuclear and industrial customers for over 60 years. We support customers across the world from facilities located in the US and UK. Our solutions are embedded in strategic national infrastructure and our people are active partners in customer programs that are focused on delivering advanced future nuclear and industrial capabilities.

Curtiss-Wright Corporation (NYSE: CW) is a global integrated business that provides highly engineered products, solutions and services mainly to Aerospace & Defense markets, as well as critical technologies in demanding commercial power, process and industrial markets. We leverage a workforce of approximately 8,600 highly skilled employees who develop, design and build what we believe are the best engineered solutions to the markets we serve. Building on the heritage of Glenn Curtiss and the Wright brothers, Curtiss-Wright has a long tradition of providing innovative solutions through trusted customer relationships.